
## 6-Core Bare Copper Alarm Cable

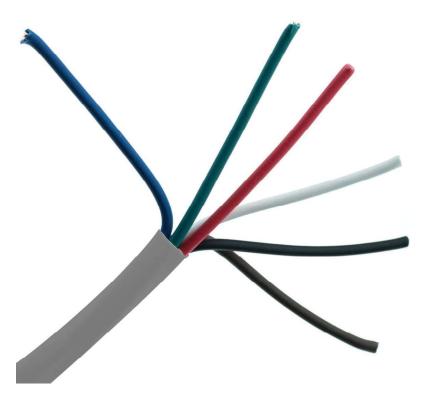

Cable Description: 6 Core alarm cable Conductor: 6C\*7/0.2mm Pure Copper (24AWG OFC) Insulation: PVC Insulation Thickness (mm): 0.25mm Insulation Dia. (mm): 1.0±0.08 Insulation Color: Red; white; green; red; Blue; Yellow; Black Nylon rips cord: 150D Jacket: PVC White Thickness : 0.6mm Overall Dia. (mm): 4.6mm±0.2 Packing 100m/roll, 200m/roll, 300m/ roll

## **Electrical Characteristics**

Max. Conductor DC Resistance at  $20^{\circ}$ C ( $\Omega/Km$ ) : <165 Rated Temperature: 70 Degrees Rated Voltage (V) : 30 Min. Insulation DC Resistance at  $20^{\circ}$ C (M $\Omega$ \*Km) : 200